


| MODEL | HQP80GF | |
|---------------------|---------|--------|
| Prime Power(50Hz) | 80KW | 100KVA |
| Standby Power(50Hz) | 88KW | 110KVA |

Standard Features

General Features:

- ◆ Engine (Perkins 1006TG2A)
- ◆ Radiator 50°C max, fans are driven by belt, with safety guard
- ◆ 24V charge alternator
- ◆ Alternator: single bearing alternator IP23, insulation class H/H
- ◆ Absorber
- ◆ Dry type air filter, fuel filter, oil filter
- ◆ Main line circuit breaker
- ◆ Standard control panel
- ◆ Batteries, rack and cable
- ◆ Ripple flex exhaust pipe, exhaust siphon, flange, muffler
- ◆ User manual

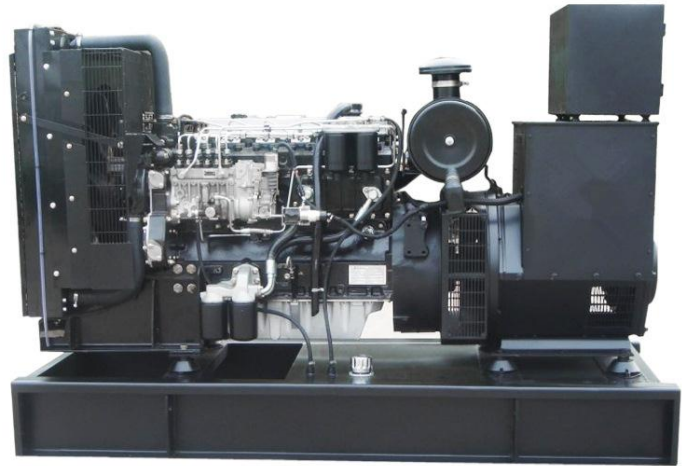

Generator Ratings

| Voltage(V) | | Hz | Phase | P.F ($\cos \phi$) | Prime Amps (A) | Prime Ratings (KW/KVA) | |
|------------|-----|----|-------|------------------------|-------------------|---------------------------|-----|
| 440 | 254 | 50 | 3 | 0.8 | 131.22 | 80 | 100 |
| 415 | 240 | 50 | 3 | 0.8 | 139.12 | 80 | 100 |
| 400 | 230 | 50 | 3 | 0.8 | 144.34 | 80 | 100 |
| 380 | 220 | 50 | 3 | 0.8 | 151.94 | 80 | 100 |

●Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820-97 (eqv ISO8528) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

●Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

Standard Features

Huaquan Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested. Warranty is according to our standard conditions: ①12 months, counted on the day Huaquan sold to the first buyer; ② One year after installation; ③ 1000 running hours (accumulated); subject to the earlier one. Service and parts are available from Huaquan Power or distributors in your location.

Engine Data

Manufacturer / Model: Perkins 1006TG2A, 4-cycle

Air Intake System: Turbocharged

Fuel System: Direct Injection

Cylinder Arrangement: 6 in line

Displacement: 5.99L

Bore and Stroke: 100*127 (mm)

Compression Ratio: 16.0:1

Rated RPM: 1500rpm

Max. Standby Power: 105KW

Governor Type: Electronic

Fuel System

100%(Prime Power) Load: 16.5L/h

Oil System

Total Oil Capacity:16.1L

Alternator Specification

Compliance with GB755, BS5000, VDE0530, NEMAMG1-22, IED34-1, CSA22.2 and AS1359 standards.

Alternator Data

Manufacturer: STAMFORD/MARATHON/ LEROY-SOMER/HUAQUAN

Number of Phase: 3

Connecting Type: 3 phase and 4 wires,"Y" type connecting

Number of bearing: 1

Power factor: 0.8

Protection grade: IP23 option,upon request

Altitude : $\leq 1000\text{m}$

Exciter type: Brushless,self-exciting

Insulation class: H

Telephone influence factor(TIF): ≤ 50

THF: $\leq 2\%$

Alternator Capacity: 100 KVA

Alternator Efficiencies: 85%

Air Cooling Flow: 0.09m³/s

Generating Set Data

- Voltage Regulation: $\geq \pm 5\%$
- Voltage Regulation, Stead State: $\leq \pm 1\%$
- Sudden Voltage Warp: $\leq +25\%$
- Sudden Voltage Warp: $\leq -20\%$
- Voltage Stable Time: $\leq 6S$
- Voltage unbalance: $\leq 1\%$
- Frequency Regulation, Stead State: $\leq 5\%$
- Frequency Waving: $\leq 1.5\%$
- Sudden Frequency Warp: $\leq +12\%$
- Transient frequency deviation: $\leq -10\%$
- Frequency Recovery Time: $\leq 5S$


Standard Features

- ◆ Standard Auto Control System
- ◆ Starting batteries
- ◆ Exhaust System
- ◆ MCCB
- ◆ Battery switch
- ◆ Shock pad
- ◆ Special tool
- ◆ Oil Drain Valve
- ◆ Documents

Options

- Engine: Engine Heater
- Alternator: Alternator Heater
- Electrical System: Remote Control Panel
- Type: Rainproof Type
- Other: Spare Parts
- Battery Charger
- PMG
- Automatic Transfer Switch
- Soundproof Type
- Daily Fuel Tank
- Air preheater
- Paralleling System
- Trailer Type

Dimension & Weight

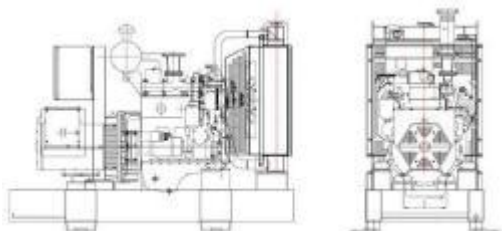

Open Type

Overall Size: 2235(mm) × 730 (mm) × 1595 (mm)
 Weight: 1050kg

Soundproof Type

Overall Size: 3000 (mm) × 1240 (mm) × 1760 (mm)
 Weight: 1870kg

Standard Control Panel



Huaquan Power uses micro processing technique integrating digital, intelligent and network techniques which can carry out functions including auto start/stop, data measure, alarming. The controller uses Smartgen LCD display, optional Chinese and English/ Russian/ Spanish display interface with operation easy and reliable. It can be widely used in all types of generator automatic control system for compact structure, advanced circuits, simple connections and high reliability.