

MODEL	HQV400GF	
Prime Power(50Hz)	400KW	500KVA
Standby Power(50Hz)	440KW	550KVA

Standard Features
General Features:

- ◆ Engine (Volvo TAD1641GE)
- ◆ Radiator 40°C max, fans are driven by belt, with safety guard
- ◆ 24V charge alternator
- ◆ Alternator: single bearing alternator IP23, insulation class H/H
- ◆ Absorber
- ◆ Dry type air filter, fuel filter, oil filter
- ◆ Main line circuit breaker
- ◆ Standard control panel
- ◆ Batteries, rack and cable
- ◆ Ripple flex exhaust pipe, exhaust siphon, flange, muffler
- ◆ User manual


Generator Ratings

Voltage(V)		Hz	Phase	P.F (cos ϕ)	Prime Amps (A)	Prime Ratings (KW/KVA)	
440	254	50	3	0.8	656.10	400	500
415	240	50	3	0.8	695.62	400	500
400	230	50	3	0.8	721.71	400	500
380	220	50	3	0.8	759.69	400	500

●Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820-97 (eqv ISO8528) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

●Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

Standard Features

Huaquan Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested. Warranty is according to our standard conditions: ①12 months, counted on the day Huaquan sold to the first buyer; ② One year after installation; ③ 1000 running hours (accumulated); subject to the earlier one. Service and parts are available from Huaquan Power or distributors in your location.



Volvo Genset

HQV400GF

Engine Data

Manufacturer / Model: Volvo TAD1641GE, .4-stroke
Air Intake System: Turbo charger
Fuel System: Electronic unit injectors, Gear driven low-pressure fuel pump
Cylinder Arrangement: 6 in line
Lubrication system: Gear type lubricating oil pump, gear driven by the transmission
Displacement: 16.12L
Bore and Stroke: 144*165 (mm)
Compression Ratio: 16.5:1
Rated RPM: 1500rpm
Max. Standby Power: 473KW
Governor Type: Electronic governing, EMS2, CAN bus signals, CIU, Control Interface Unit

Exhaust system

Max Back Pressure: 10kPa
Exhaust gas flow: 85 m³/min

Air Intake System

Max Intake Restriction: 5kPa

Fuel System

25% (Prime Power) Load: 216g/Kw.h
50% (Prime Power) Load: 199g/Kw.h
75% (Prime Power) Load: 196g/Kw.h
100% (Prime Power) Load: 199g/Kw.h

Oil System

Total Oil Capacity: 42L
Oil Consumption: ≤0.1L/h

Cooling System

Total Coolant Capacity: 80L
Fan power consumption: 11KW

Alternator Specification

Compliance with GB755, BS5000, VDE0530, NEMAMG1-22, IED34-1, CSA22.2 and AS1359 standards.

Alternator Data

Manufacturer: STAMFORD/MARATHON/ LEROY-SOMER/HUAQUAN

Number of Phase: 3

Connecting Type: 3 phase and 4 wires,"Y" type connecting

Number of bearing: 1

Power factor: 0.8

Protection grade: IP23 option,upon request

Altitude : $\leq 1000\text{m}$

Exciter type: Brushless,self-exciting

Insulation class: H

Telephone influence factor(TIF): ≤ 50

THF: $\leq 2\%$

Alternator Capacity: 500KVA

Alternator Efficiencies: 85%

Air Cooling Flow: $0.09\text{m}^3/\text{s}$

Generating Set Data

Voltage Regulation: $\geq \pm 5\%$

Voltage Regulation, Stead State: $\leq \pm 1\%$

Sudden Voltage Warp: $\leq +25\%$

Sudden Voltage Warp: $\leq -20\%$

Voltage Stable Time: $\leq 5\text{S}$

Voltage unbalance: $\leq 1\%$

Frequency Regulation, Stead State: $\leq 5\%$

Frequency Waving: $\leq 0.5\%$

Sudden Frequency Warp: $\leq +10\%$

Transient frequency deviation: $\leq -7\%$

Frequency Recovery Time: $\leq 3\text{S}$

Standard Features

◆ Standard Auto Control System

◆ Starting batteries

◆ Exhaust System

◆ MCCB

◆ Battery switch

◆ Shock pad

◆ Special tool

◆ Oil Drain Valve

◆ Documents

Options

Engine: ◇ Engine Heater

Alternator: ◇ Alternator Heater

Electrical System: ◇ Remote Control Panel

Type: ◇ Rainproof Type

Other: ◇ Spare Parts

◇ Battery Charger

◇ PMG

◇ Automatic Transfer Switch

◇ Soundproof Type


◇ Daily Fuel Tank

◇ Air preheater

◇ Paralleling System

◇ Trailer Type

Dimension & Weight

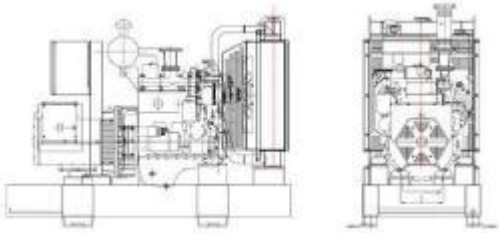

Open Type

Overall Size: 3900(mm) × 1280 (mm) × 2080 (mm)

Weight: 3700kg

Soundproof Type

Overall Size: 4700 (mm) × 2100 (mm) × 2450 (mm)

Weight: 5960kg

Standard Control Panel



Huaqian Power uses micro processing technique integrating digital, intelligent and network techniques which can carry out functions including auto start/stop, data measure, alarming. The controller uses Smartgen LCD display, optional Chinese and English/ Russian/ Spanish display interface with operation easy and reliable. It can be widely used in all types of generator automatic control system for compact structure, advanced circuits, simple connections and high reliability.

Typical Projects

